


To prevent balls from catching in Down the Clown

Step 1: Remove ball ramp by removing the 4 retaining bolts



Step 2: Using a razor knife trim the edge of the T-molding on the back side of the ball ramp so that it is flush with the wood.

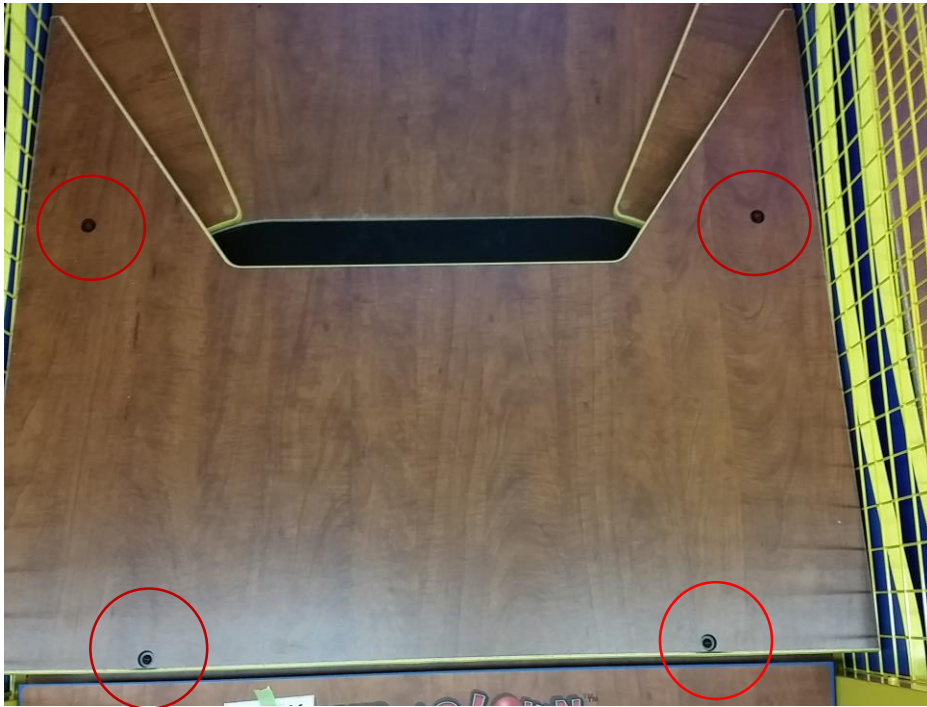

Step 3: Install the rear bolts back through the ball ramp adding the spacer (part number AA6293) in between the ball ramp and the ball gate.



Step 4: Reinstall the front bolts and tighten. When tightening all bolts take care not to overtighten as this will cause the ball ramp to bow.