



HOW TO SWAP OR TIGHTEN A GOALIE KNOB

1. Remove all dome bolts
2. Open dome and secure with dome cable.
3. Remove goalie with #1 phillip bit.
4. Push the other men to center ice, so you can lift ice on that side
5. Remove goal net (it just lays on the slotted rail)
6. Remove goalie block (just twist and it comes out of handle)
7. Grasp bolt with pliers and turn knob to the right
8. Turn knob left after tightened to be sure clutch turns but bolt does not.

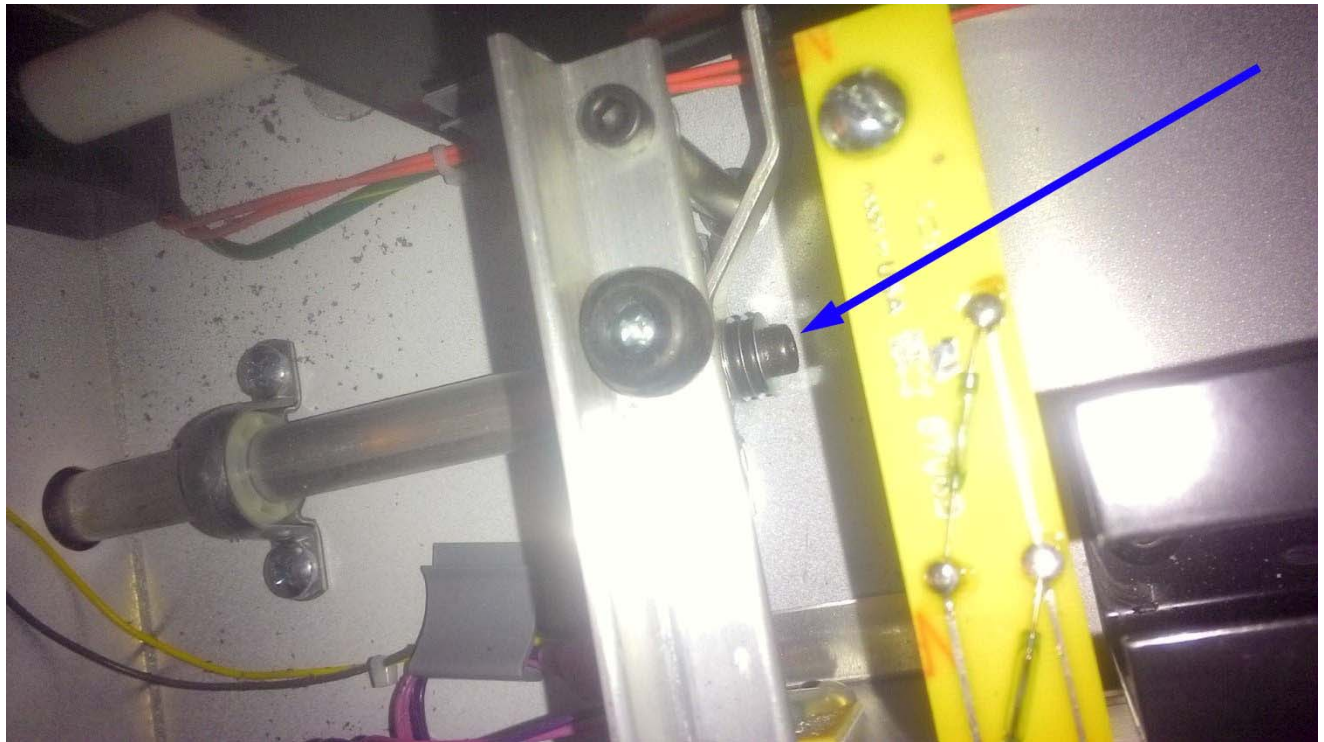

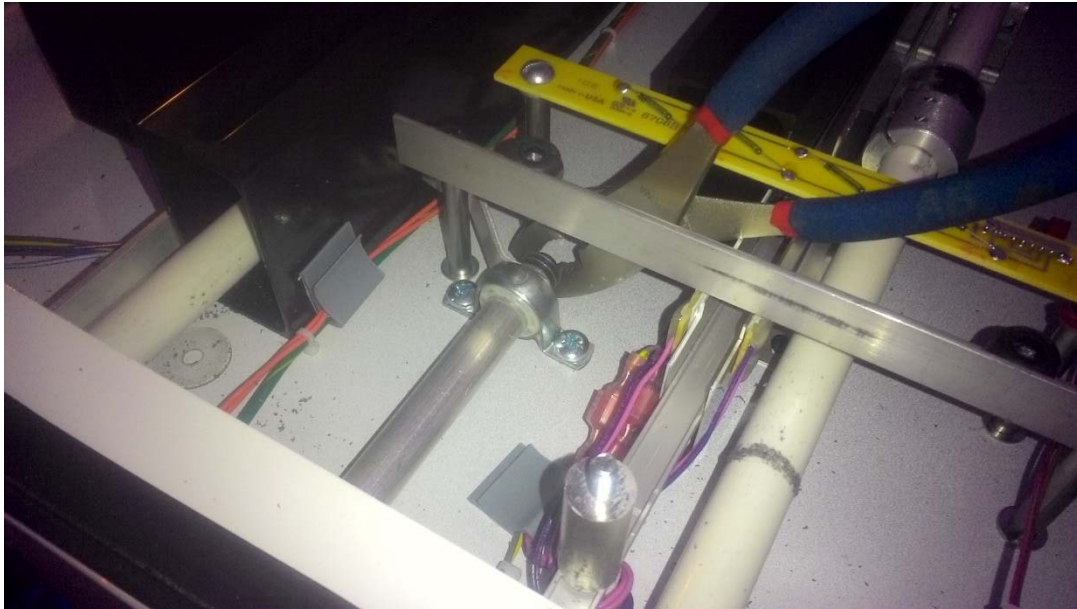

Now you can re-insert the goalie arm and block as shown below:



This is how the end of the goalie know should look:

